

# Pressure Vacuum Relief Valve with Flame Arrestor

End-of-line, weight loaded, combination,  
atmospheric deflagration proof

**Model 100 + 300**



## Product Description

The assembly of this pressure relief valve with an effective flame arrestor will enhance the safety of personnel, site location, and equipment, by reducing or eliminating the risk of flash over through the vent.

It will be useful to look at more detailed catalogs for the Model 300 and Model 100 to examine the technical specifications, performance data, application areas and other details of both models.

## The Unit Will Comprise

Model 300	Flame Arrestor - Vertical, in-line, deflagration
Model 100	Pressure Vacuum Relief Valve - Top mounted, end of line, weight

## Additional Information


Data Sheet	Pressure Relief, Vacuum Relief, and Pressure-Vacuum Relief Valves
Data Sheet	Model 300 In-line Deagration Flame Arrestor
Data Sheet	Model 100 Pressure-vacuum Relief Valve (weight-loaded; discharge to atmosphere)



StorageTech provides the high quality and reliable solutions for your needs with 40 years of experience.

Your investments will be much safer with Storagetech™ Flame Arrestor solutions, which are completely produced in accordance with international norms.

<b>Standard Sizes</b>	2" to 16"(IIA) / 2" to 12"( IIB)
<b>Body / Flanges</b>	1- Carbon steel 2- Stainless steel AISI 304 -L or 316-L 3- Aluminium 4- Customer Specification
<b>Flange Drilling</b>	ANSI #150, PN16, and Special
<b>Flame Element</b>	Stainless steel AISI 304 -L or 316-L
<b>O-ring Seal</b>	Nitrile, Viton, Special
<b>Screen</b>	SS 304
<b>Paint Finish</b>	1- Powder Coating, Colour RAL 9006 2- Epoxy Paint, Colour RAL 9006 3- Customer Specification
<b>ATEX Cert</b>	Ex II 1/2 G IIA , G IIB

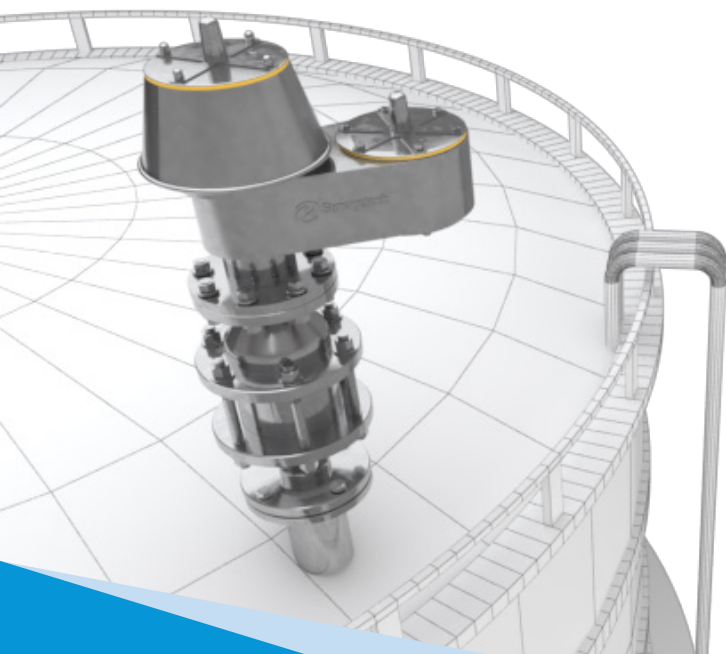

## Product Benefits

Storagetech's Model 300 Pressure Vacuum Relief Valve with Flame Arrestor provides protection to bulk storage tanks and vessels from over and under-pressurization.

The valves are mounted on the tank roof flange or a vent pipe from the vapour space. In the closed position the pressure relief pallet and diaphragm assembly are held tightly against a seal to prevent the loss of vapour to the atmosphere.

As the internal pressure in the tank increases, due to product filling and vapour development, the pressure in the tank increases, and in the event that the set pressure of the unit is reached, the diaphragm will open and discharge the gas into the atmosphere.

The opening set-point is select able from a range between +61 mbar and +1000 mbar (+24 inch W.C. and 400 inch W.C.), and the valve will reseal when the tank returns to a safe pressure.

An in-line flame arrestor combination provides extra safety and avoids flame entrance inside the storage tank or pipe through valve openings. The flame arrestor can be unbolted and removed easily for maintenance purposes without affecting the pressure vacuum relief valve function.



## Construction

<b>Standard Sizes</b>	2" to 12" (DN50 to DN300) Further sizes are applicable upon request.
<b>Flanges</b>	ANSI, DIN, JIS, BSP
<b>Body</b>	Carbon Steel, Stainless Steel or Aluminium
<b>Seals</b>	Klingrit, Nitrile, Viton, PTFE
<b>Pallet</b>	Stainless Steel AISI 304/316
<b>Springs</b>	Stainless Steel
<b>Paint Finish</b>	<ol style="list-style-type: none"> <li>1. Customer Specification</li> <li>2. Powder Coating, Colour RAL 9006</li> <li>3. Epoxy Paint, Colour RAL 9006</li> <li>4. PTFE Coating</li> </ol>
<b>ATEX Cert</b>	Ex 111/2 G c II B

\* When removing, cleaning, and replacing element banks, it is vital that the installation, operation, and maintenance instructions (IOMs) provided by the manufacturer are strictly adhered to.

## Pressure Vacuum Relief Valve with Flame Arrester

It is suitable for use with any of StorageTech™ Pressure Relief, and Pressure-Vacuum Valves, and should be installed on the inlet to the Pressure Relief unit.

StorageTech™ Flame Arrester Model 300 provides safety. It blocks the flame and does not allow flame travel through a pipeline or any in outlet. Protect s environment. Flame arrester prevents your facility against fire that is caused by explosions. Controls the internal pressure of a storage tank or a container.

Flame arresters are designed to inhibit flame propagation in gas piping systems and to protect low pressure tanks containing flammable liquids. Arresters protect low flash point liquids from external sources of heat and ignition, increasing fire protection and safety.


### Design & Manufacturing Specifications



The size of the vent will be calculated in accordance with API Standard 2000-Venting Atmospheric and Low-Pressure Storage Tanks or other international standards

### Standard Compliance

In-Line Deflagration Flame Arresters has been type-tested to EN ISO 16852 and approved according to ATEX Directive 2014/34/EU.

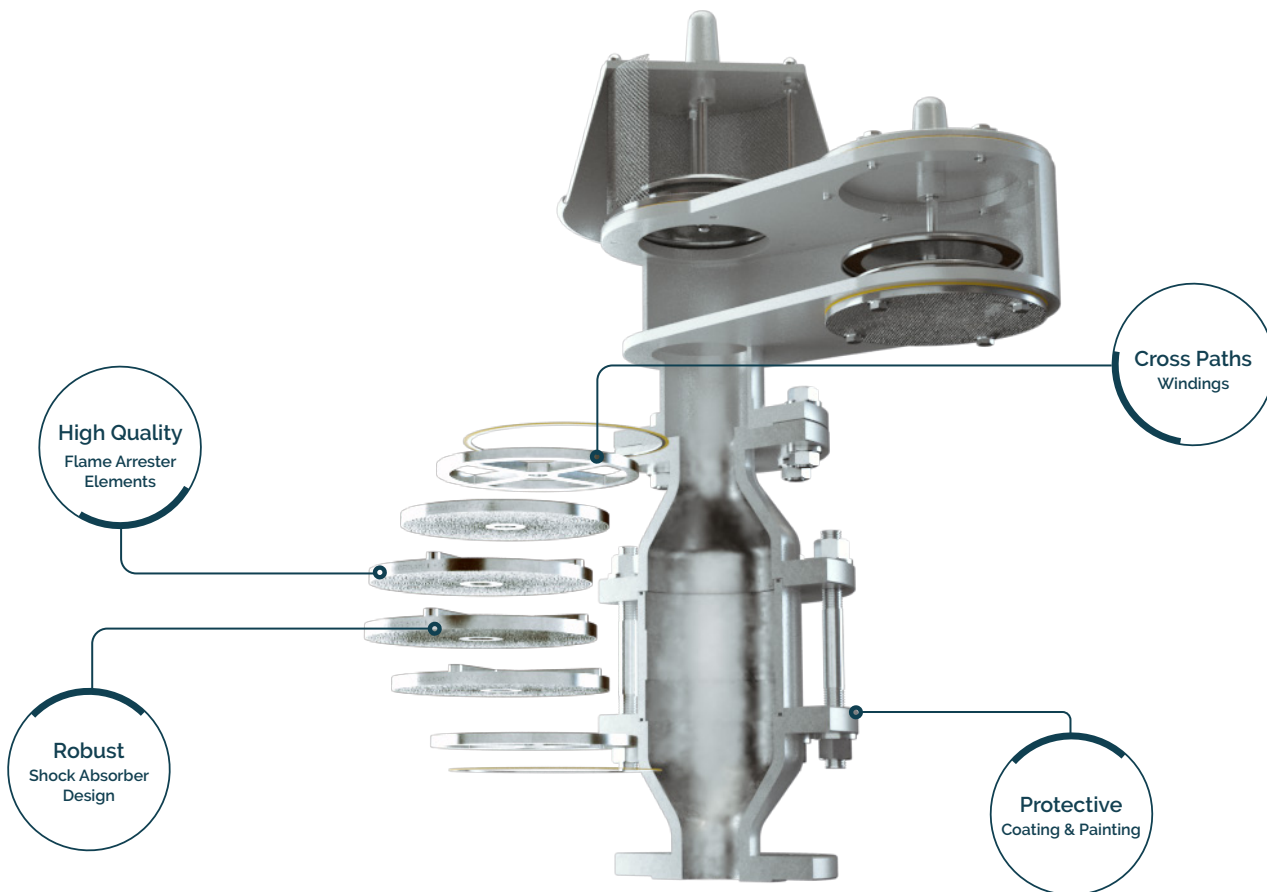

### Key Features


- StorageTech™ PW Model 300 internal materials are AISI 316 or 304 stainless steel.
- Easy to clean internal materials.
- Easy to install. You do not need a special tool or experience to install the StorageTech™ Flame Arrester with pressure vacuum relief valve.
- StorageTech™ PVV Model 100 and model 300 Flame Arrester comes with the paint color you choose.
- Standard manufacturing comes with ANSI 150# flange; however other flange types are available on request.
- Also available with cap that is used to protect the fame arrester against dust and rain.

## Setting Range

**Pressure** Weight-loaded  $\pm 2.5$  mbar and  $\pm 35$  mbar. ( $\pm 1$  inch W.C and  $\pm 14$  inch W.C)

\*Different settings can be applicable as per request

**Ambient temp.**  $-20^{\circ}\text{C}$  to  $+60^{\circ}\text{C}$

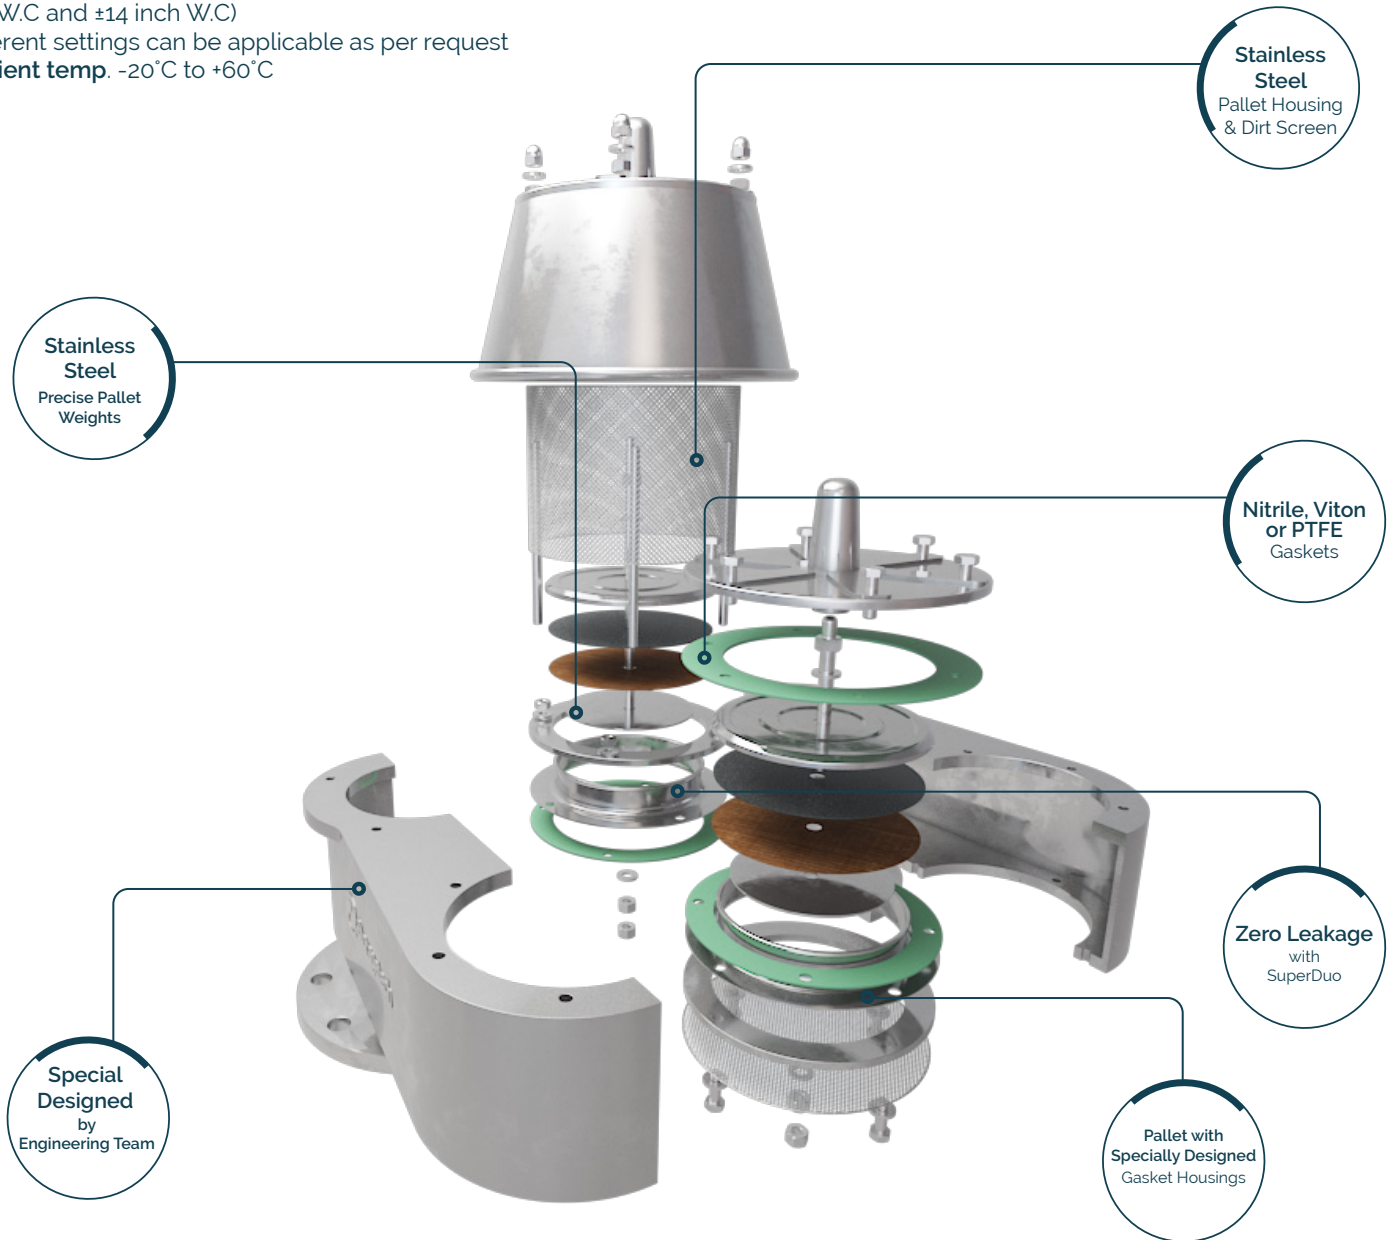


### Key Features

- Easy to install. Do not need a special tool or experience.
- Light weight construction.
- Quick and easy to install, inspect and clean.
- Any grade materials are available.
- Has stainless steel pallets.
- Large weatherhood provides maximum airflow.
- Internal materials are resistant to winter conditions.
- Special designs can be achievable upon request to meet individual specifications.
- Vacuum and relief cases can be managed effectively as per the set requirements of bulk storage tank.

- Super Duo technology provides extra curves and perfect seating with zero leakage.
- Set values can be arranged as per the site conditions, no need supervising.
- Diaphragm is manufactured from PTFE material to prevent possibility of ice formation and sticky residues hindering the valve from opening, while the pallet assembly moves freely on guide posts.
- Design, manufacturing and test according to EN ISO 80079-36.
- Breathing requirements are fulfilled according to API 2000 7th Edition.
- PTFE, XYLAN, Rubber lining, etc. coating options are available.

## Technical Drawing

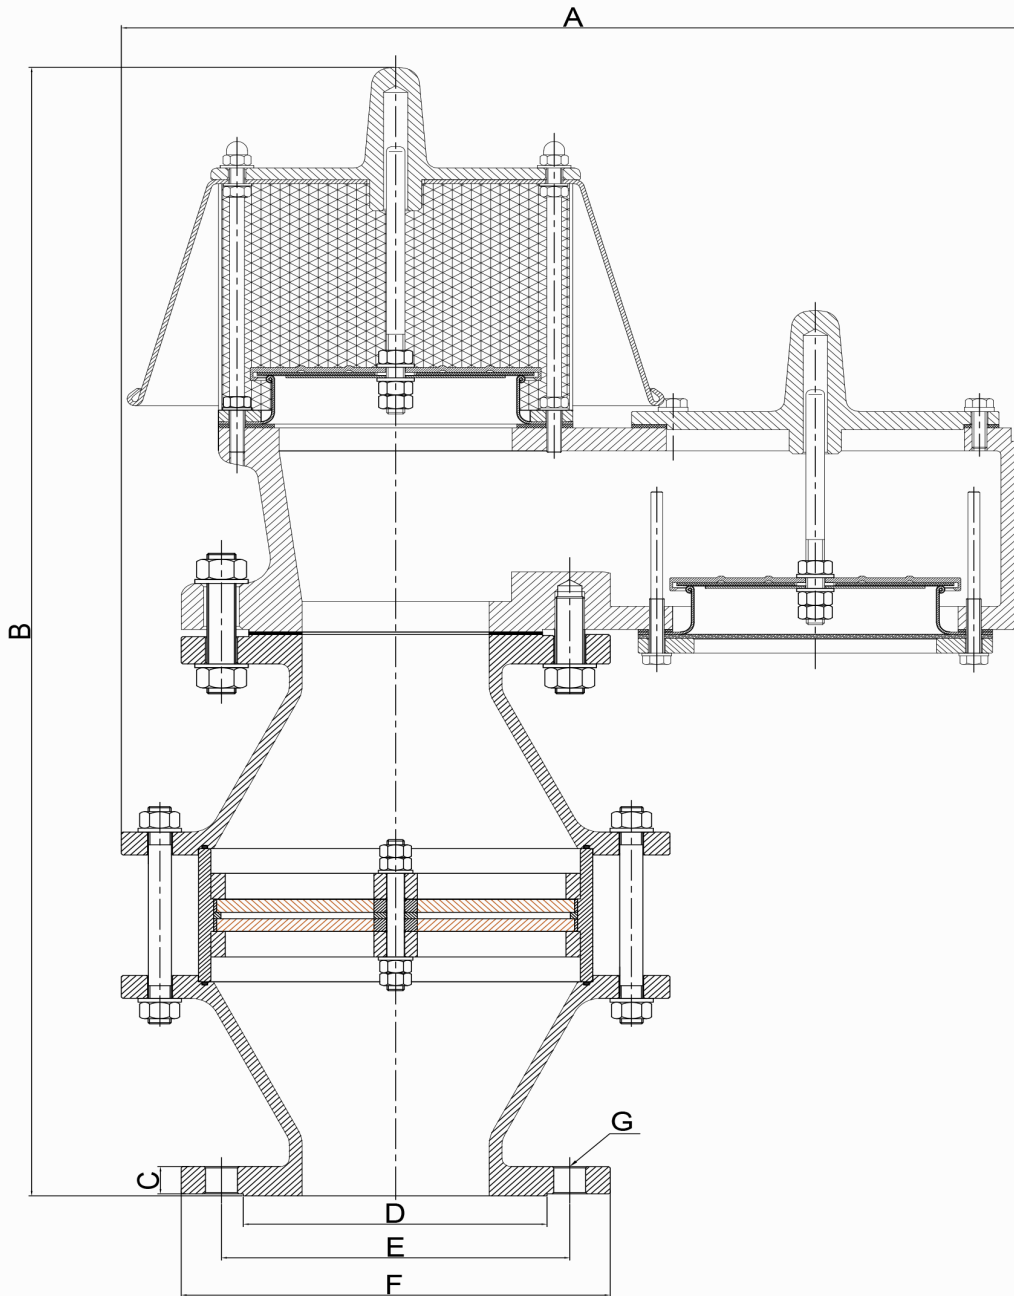

## Weight & Dimensions

SIZE		A	B	C	D		E		F		G		TOTAL WEIGHT (kg)				
NPS	DN				ANSI 150# RF	PN 16	ANSI 150# RF	PN 16	ANSI 150# RF	PN 16	ANSI 150# RF	PN 16	ANSI 150# RF	PN 16	WELDED		CASTING
													CS	SS	AL	CS	SS
2"	50	310	607	18	92	102	120.6	125	152	165	Ø19x4	Ø18x4	22-33	25-33	9-13	29-39	29-39
3"	80	350	760	18	127	138	152.4	160	190	200	Ø19x4	Ø18x8	48-58	48-58	20-26	58-70	58-70
4"	100	425	881	18	157.2	158	190.5	180	229	220	Ø19x8	Ø18x8	68-78	68-78	34-42	81-95	81-95
6"	150	460	1132	18	216	212	241.3	240	279	285	Ø22x8	Ø22x8	104-118	104-118	53-65	129-150	129-150
8"	200	490	1600	18	270	268	298.4	295	343	340	Ø22x8	Ø22x12	185-205	185-215	82-97	210-250	210-250
10"	250	550	1904	18	324	320	362	355	406	405	Ø25.4x12	Ø26x12	255-290	255-300	150-190	335-395	335-395
12"	300	550	1500	18	381	378	431.8	410	483	460	Ø25.4x12	Ø26x12	400-455	400-475	260-310	540-620	540-620

<b>A</b>	•Element Diameter
<b>A-H</b>	•Element Height
<b>B</b>	•Element Housing Diameter
<b>B-H</b>	•Element Housing Height
<b>C</b>	•Element Holder Diameter
<b>C-H</b>	•Element Holder Height
<b>D</b>	•Spacer Diameter
<b>D-H</b>	•Spacer Height

MODEL	IIA DEFLAGRATION - MODEL 330									
SIZE	2"	3"	4"	6"	8"	10"	12"	14"	16"	
<b>A</b>	100	150	200	250	300	500	600	700	800	
<b>A-H</b>	10	10	10	10	10	15	15	15	15	
<b>B</b>	100	200	250	280	350	550	700	800	900	
<b>B-H</b>	90	90	90	100	100	200	200	200	200	
<b>C</b>	100	150	200	250	300	500	600	700	800	
<b>C-H</b>	10	10	10	20	20	20	20	20	20	
<b>D</b>	100	150	200	250	300	500	600	700	800	
<b>D-H</b>	6	6	6	6	6	6	6	6	6	

MODEL	IIB DEFLAGRATION - MODEL 330							
SIZE	2"	3"	4"	6"	8"	10"	12"	
<b>A</b>	100	200	250	300	400	500	600	
<b>A-H</b>	30	30	30	30	30	30	30	
<b>B</b>	150	250	300	350	450	550	700	
<b>B-H</b>	131	151	151	212	232	232	232	
<b>C</b>	100	200	250	300	400	500	600	
<b>C-H</b>	18	28	28	28	38	38	38	


## Flow Capacity Tables

Pressure Drops (mbar)


Gas Group	Element	Pipe Size	Flow in Nm <sup>3</sup> /h Air																					
			5	10	15	20	30	40	50	60	70	80	90	100	150	200	300	400	500					
IIA	100/10/54	DN50	2"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.7	0.9	2.2	3.8	8.8	15.6	26.2			
	150/10/54	DN80	3"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	0.8	1.7	2.6	4.8			
	200/10/54	DN100	4"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.7	1.3		
	250/10/54	DN150	6"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	
	300/10/54	DN200	8"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	
	500/15/54	DN250	10"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
	600/15/54	DN300	12"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
IIB	100/30/35	DN50	2"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.7	1.1	1.4	1.8	2.3	5.1	9.2	20.3	36.8	58.2				
	200/30/35	DN80	3"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.5	1.1	2.8	5.2	7.4				
	250/30/35	DN100	4"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.9	1.9	3.2			
	300/30/35	DN150	6"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.7	1.2		
	400/30/35	DN200	8"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
	500/30/35	DN250	10"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5
	600/30/35	DN300	12"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5

Gas Group	Element	Pipe Size	Flow in Nm <sup>3</sup> /h Air																						
			600	700	800	900	1000	2000	3000	4000	5000	6000	7000	8000	9000	10000	12000	16000	18000						
IIA	100/10/54	DN50	2"	39.3	51.2	68.5	85.2	106.8																	
	150/10/54	DN80	3"	7.1	9.2	12.2	15.9	19.2	79.3	189.4															
	200/10/54	DN100	4"	1.8	2.9	3.4	4.1	5.2	20.9	48.3	86.5	139.2													
	250/10/54	DN150	6"	0.7	0.9	1.2	1.5	2.2	7.1	16.8	30.1	45.8	76.9	93.2	123.5	157.1	197.3								
	300/10/54	DN200	8"	<0.5	<0.5	0.5	0.8	1.1	3.9	9.2	15.5	25.1	38.3	49.7	65.2	83.3	103.5	151.4							
	500/15/54	DN250	10"	<0.5	<0.5	<0.5	<0.5	<0.5	0.7	1.9	2.7	5.3	7.4	9.2	12.5	15.3	19.2	27.8	49.4	63.8					
	600/15/54	DN300	12"	<0.5	<0.5	<0.5	<0.5	<0.5	<0.5	0.8	1.4	2.3	3.4	4.9	6.2	7.1	8.7	13.2	24.4	30.2					
IIB	100/10/54	DN50	2"	83.7	115.3	151.5	195.4	245.6																	
	150/10/54	DN80	3"	10.1	14.2	18.6	23.2	29.5	118.2																
	200/10/54	DN100	4"	3.9	5.1	7.2	8.8	11.3	45.5	103.2	188.4														
	300/30/35	DN150	6"	1.8	2.3	3.3	4.1	5.4	20.1	45.2	80.3	128.5	187.6												
	400/30/35	DN200	8"	<0.5	0.7	1.3	1.6	2.3	8.2	17.4	30.8	49.3	71.3	97.6	128.2	165.3	206.4								
	500/30/35	DN250	10"	<0.5	<0.5	<0.5	<0.5	0.6	2.8	6.2	11.3	17.5	24.3	32.7	42.6	55.5	68.1	99.3	181.9	234.2					
	600/30/35	DN300	12"	<0.5	<0.5	<0.5	<0.5	<0.5	1.1	3.2	4.7	8.2	11.3	15.4	20.3	25.5	31.1	45.2	81.6	104.3					

## Technical Drawing

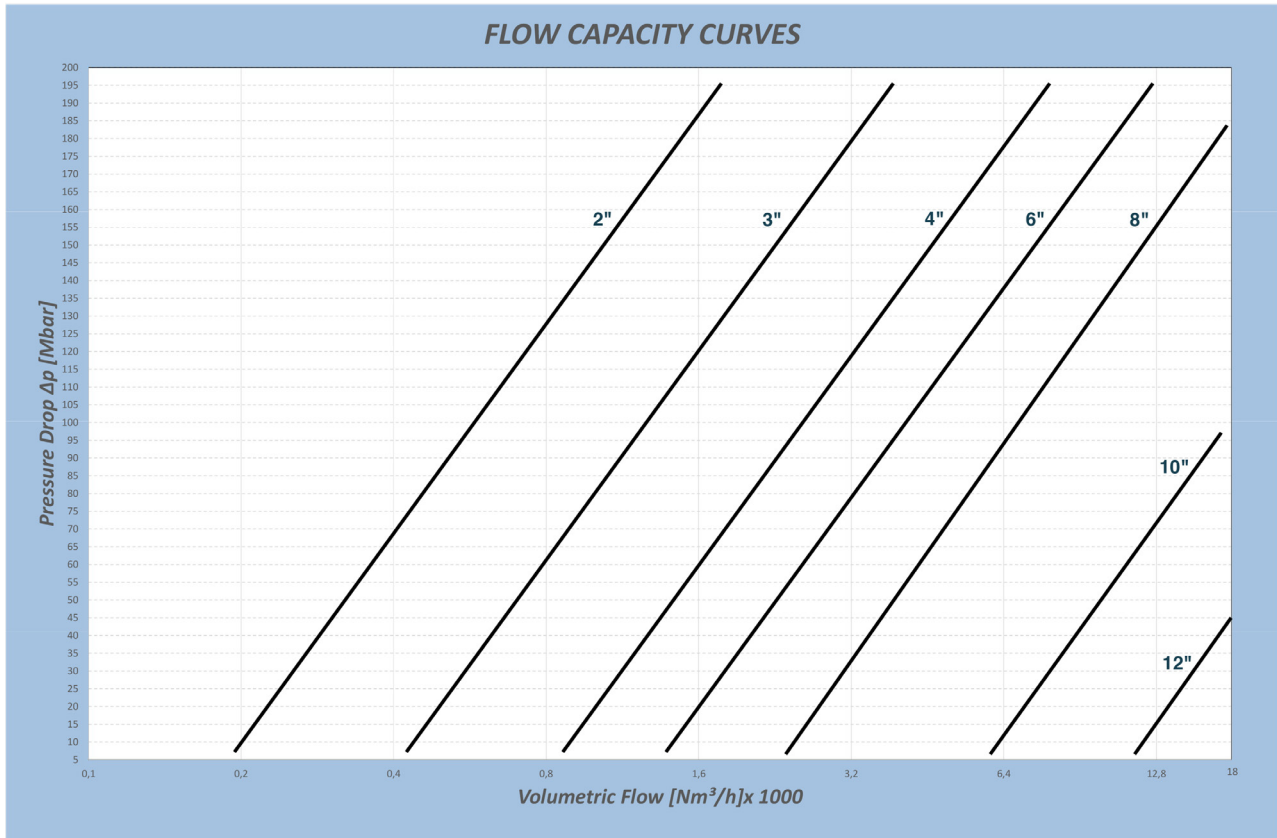

In Line Def.

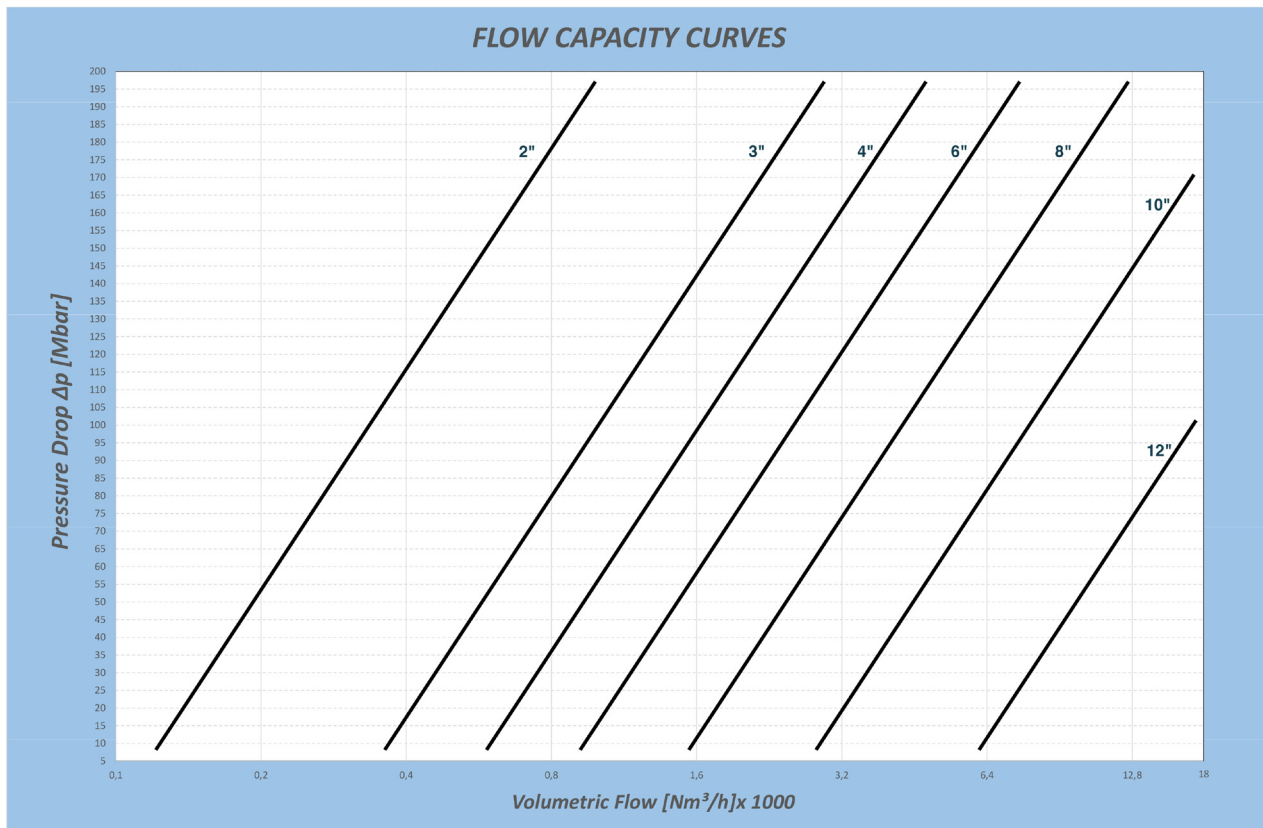

In Line Def.

# Product Recommendations




**Biogas Safety Selector Valve (SSV)**

Model: 250

The Storagetech Biogas Safety Selector Valve (SSV) is an advanced, cost-effective alternative to traditional three-way plug valves, designed for seamless operation in biogas systems. It enables smooth switching between Pressure and Vacuum Relief Valves (PVRs) with Flame Arresters, ensuring uninterrupted operation during maintenance.

Storagetech™ manufactures storage tank equipment, such as flame arresters, breather valves, gauge hatches, floating roofs, and floating suction pipe.




**Flame Arrestor**

Horizontal,  
In-Line,  
Detonation

Model: 321

Storagetech™'s Model 321 In-line Detonation Flame Arrestor (also called flame arrestor or fire arrestor) is designed for installation in gas pipelines. Detonation occurs when a flame travelling through the pipeline reaches supersonic velocities, usually as a result of the pipeline configuration or pipeline surface roughness. Changes in gas density and pressure causes the flame velocity to metamorphose from subsonic to supersonic.




**Flame Arrestor**

Vertical,  
In-Line,  
Detonation

Model: 320

Storagetech™'s Model 320 In-line Detonation Flame Arrestor (also called flame arrestor or fire arrestor) is designed for installation in gas pipelines. Detonation occurs when a flame travelling through the pipeline reaches supersonic velocities, usually as a result of the pipeline configuration or pipeline surface roughness. Changes in gas density and pressure causes the flame velocity to metamorphose from subsonic to supersonic.



**Flame Arrestor**

Vertical,  
In-Line,  
Deflagration

Model: 300

Storagetech™'s Model 300 Vertical In-line Deflagration Flame Arrestor (also called flame arrestor or fire arrestor) is intended for pipeline installation close to the source of any potential ignition source by minimising flame speed and the development of an explosive pressure.

## Äager GmbH

Germany Head Office + R&D + Sales  
Herzogspitalstraße 24  
Munich 80331  
Germany  
+49 (0) 89 1250 15240  
www.aager.de  
sales@aager.de

Turkey Head Office + Sales  
Ağaoğlu My Office 212  
No: 3 B Blok /175  
PK 34218 Güneşli – Bağcılar  
Istanbul / Turkey  
+90 212 485 40 07  
+90 212 485 40 42  
sales@aager.de  
sales@storagetech.de

Turkey Factory + Engineering + R&D + Sales  
Mersin Tarsus OSB.13.CD.NO:7  
PK: 33540 Mersin, Turkey  
+90 324 676 44 04  
+90 324 676 44 03  
sales@aager.de  
sales@storagetech.de

UAE Sales + Warehouse  
Jumeirah Lake Towers, X2 Tower 1906  
P.O. Box: 123661 Dubai, UAE  
+971 4 450 8051  
+971 4 450 8041  
sales@storagetech.de

KSA Sales + Warehouse  
Q1-14, The Business Quarter,  
King Faisal Road,  
Al Khalidiyyah Al Janubiyah,  
Dammam, KSA  
+966138163471  
sales@storagetech.de

### data sheet series

PVRV with FA - E.O.L., W.L.,  
comb., atmospheric def. proof

Revision No: 03  
ST-DS-PV.FA.DF-04.25/V3  
storagetech.de

April 2025

